



دستگاه حضور و غیاب

BioFace E440

اکسس کنترل و تشخیص چهره

♦ با قابلیت دسترسی و گزارش گیری لحظه ای از وضعیت حضور و غیاب پرسنل
♦ نرم افزار حضور و غیاب آنلاین

♦ با قابلیت اتصال به نرم افزار اتنسی
♦ همراه با اپلیکیشن اندروید و IOS

مشخصات فنی



لینوکس	سیستم عامل		۵۰۰
چهره/کارت/اثر انگشت	کاربری		۳۰۰۰
ندارد	باتری داخلی		۳۰۰۰
RF۱۲۵KHZ	نوع کارت		۲۰۰،۰۰۰

حافظه/ظرفیت



ظرفیت ذخیره چهره	
ظرفیت اثر انگشت	
ظرفیت ثبت کارت	
لاگ/ظرفیت تردد	

مشخصات تکمیلی



دارد	TCP/IP		۱۸۵*۵۸.۵*۲۰ mm
دارد	WIEGAND/RELAY		دارد
دارد	USB/SD		۲.۵ inch-touch
دارد	RS485		۲۰۰۰


مشخصات ظاهری



ابعاد دستگاه	
منوی فارسی	
صفحه نمایش	
ظرفیت ذخیره دوربین	

Display	2.4-inch touch Screen
Biometric	Face/Fingerprint
QR Code Module	/
RFID	ID card(Optional), IC card(Optional)
User Capacity	3,000
Card Capacity	3,000 (Optional: 10,000)
Face Capacity	500 (Optional: 1,500)
Fingerprint Capacity	3,000 (Optional: 5,000)
Logs Capacity	200,000
Facial Recognition Algorithm	ZKFace 3.5
Facial Recognition Speed	<1s
Facial Recognition Distance	0.5m to 2m
Communication	TCP/IP, WiFi(Optional), Wiegand Input/Output, RS485
Operation System	Linux
Standard Functions	ADMS, DST, Camera, 14-digit User ID, Access Levels, Groups, Holidays, Anti passback, Record Query, Tamper Switch Alarm, Multiple Anti-Passback
Hardware	1.2GHz Dual Core CPU, 256MB RAM/512MB Flash, 1MP Binocular Camera Adjustable LED Fill Light
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm output, Auxiliary Input
Power Supply	12V 3A
Ingress Protection Rating	IP65
Operating Temperature	-5°C to 45°C
Operating Humidity	10% to 90% RH
Dimensions(L*W*D)	185*58.5*20mm
Supported Softwares	ZKBio Access, Mobile App

Configuration

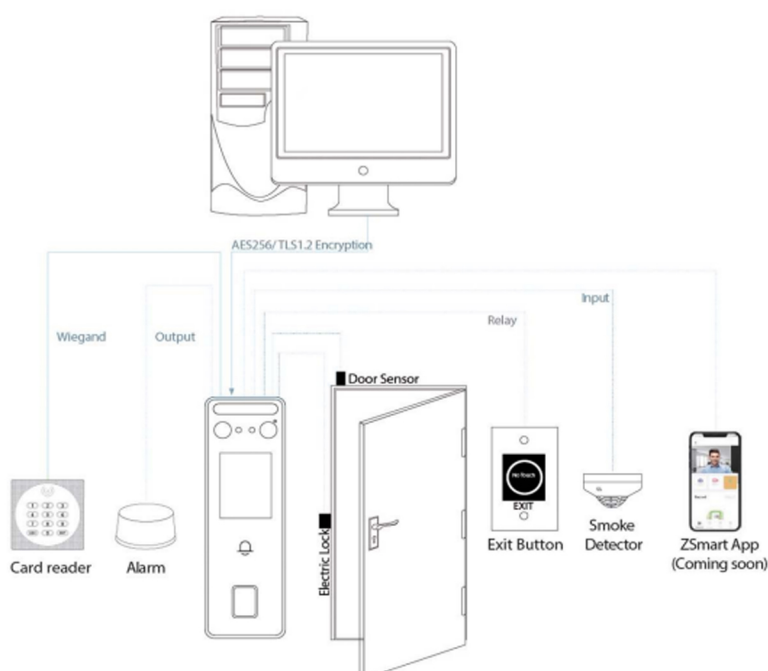

Dimensions (mm)

